


# Enabling the NetFlow Capture Service

The NetFlow-capture service enables your Lumeta Command Center to ingest NetFlow data.

To enable NetFlow capture from the Lumeta GUI:

1. On the Lumeta main menu, browse to **Settings > Support Tools > Status of Lumeta Components**.
2. Start the Netflow Packet Capture Service and click **Run**.

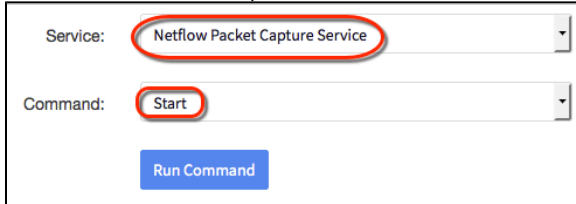

The screenshot shows a GUI interface for running a command. It features two dropdown menus. The first dropdown, labeled "Service:", has "Netflow Packet Capture Service" selected and is circled in red. The second dropdown, labeled "Command:", has "Start" selected and is also circled in red. Below these dropdowns is a blue button labeled "Run Command".

The status of the service will change to Running.

To enable NetFlow capture from the Lumeta command-line interface:

1. [Log in to the CLI](#).
2. At the command-line prompt, enter `support service packetcapture start`.
3. Exit the CLI.